

SIDING

- Special for decorative uses
- 100% Radiata Pine
- FSC[®] certified product




The mark of
responsible forestry

PRODUCT BENEFITS AND APPLICATIONS

- Ideal for both interior and protected exterior use
- Gives any Project a sophisticated and refined look
- Has a multiple profiles available, offering suitable options for any Project
- Comes with a shiplap that allows for precise installation

FEATURES

	Selex Siding	C
Solid face	✓	✗
Live Knots	✓	✓
Dead Knots	✗	✓
Routings with polyurethane	✗	✗
Putty patches	✓	✗
Wooden patches	Occasionally	✗

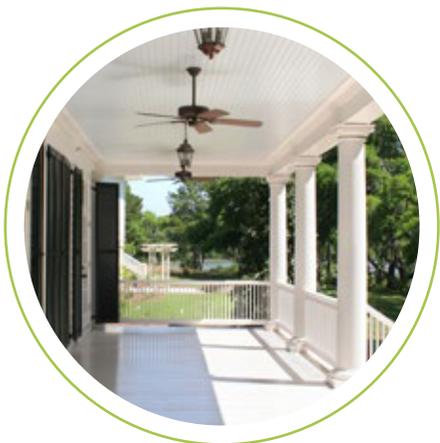

Soffit




Exterior Use



Decorative projects

PROFILES AVAILABLE

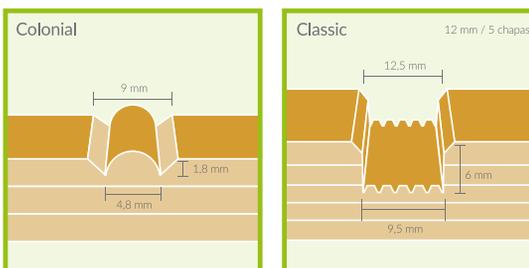

GENERAL SPECIFICATIONS

Dimensions 4x8 (1,22 x 2,44 m)	Thickness (mm)	9	12	15
	N° of plies	3	5	7
Density	480 - 550 kg / m ³			
Adhesive	Phenol-formaldehyde that complies with the E1 emission and CARB standard			
Structural certification	PS1- 19 by TP & EN 13986 (CE2+) by HFB			
Moisture content	8% to 12 % for all boards			
Forestry certification	FSC® certified product			